

APPLICATION INSTRUCTIONS

FiberPlus

FiberPlus can be printed with sublimation ink. It gets its pleasant textile surface from the unique microfibre flock used. It also has high elasticity and an excellent touch.

FEATURES:



PU water-based



400µ



Cotton, polyester, blended fabrics..
Less suitable for nylon and other coated textiles.



Sublimation

SUBLIMATION CONDITIONS:



190 - 210 °C



40 - 30 s



low

CUTTING CONDITIONS:



Blade 30 - 45°



low/medium



30 - 40 cm/s

TRANSFER CONDITIONS:



160 - 170 °C



17 - 15 s



low/medium



warm peel




60 °C



1. Print mirrored on suitable sublimation paper (with registration marks)



2. Transfer the sublimation pigments



3. Cut contour



4. Weed design



5. Transfer, remove tape, done !


Recommended transfer tape: FlockTape

Connected designs can also be transferred without tape.



Demo Video

► PACKAGING

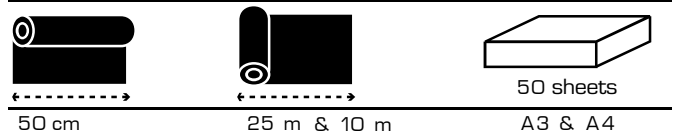

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.